



-

27820 — 88

(5092 — 85)

-

Elements, products of wood and wooden materials. Method for determining resistance to wear of protective and decorative coatings

5609

27820—88

(CT 5092—85)

01.01.90
01.01.95

()

.

,

1.

1.1. () -

().

1.2. () 100X100 -


(18±2) ;

1.3. 7,0 . -

(23±2) ° 72 55—70%.

2.

(.), ,
 (55±6) “1”,
 50 55) (500 , ();
 64 56—82;
 18326—87 1 0 0 , 0,8; 1,0 ;
 - 2- 7328—82; ±0,001 ;
 166—80;
 ().

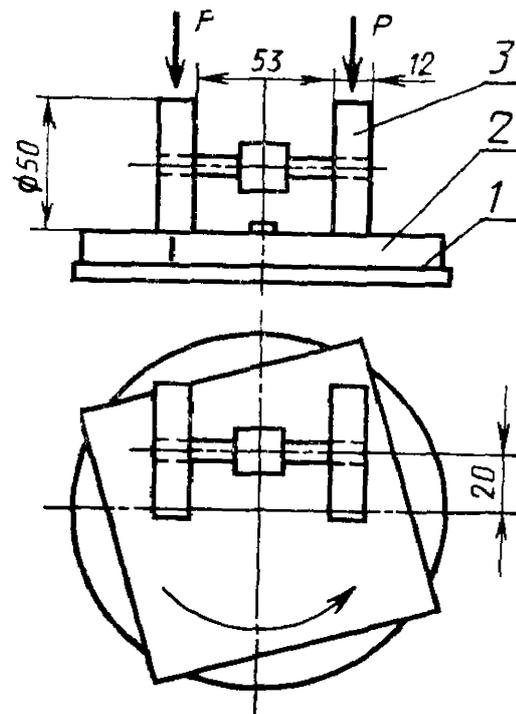

1—
3—

2—

3.

3.1.

(/)

1.

-

3.2.

(168±2)

(12,0±0,6)

3.3.

-

. 1.2.

3.4.

4.

4.1.

()

4.1.1.

()

()

±0,001
2),

-

-

25

(0+10)

4.1.2.

25

(2)

4.1.3.

4.2.

(Z)

4.2.1.

25

(500±10)

4.2.2.

2 5

4.2.3.

50%

4.2.4.

4.2.5.
2).

(. -

5.

5 .

25

(/)

1 1^2

\—
2—
/—

, ;
, ;

5.1.1. (.

1).

5.2.

(Z)

Z—n-f,

—
f—

;

5.3.

5.4.
2).

(. -

1.) (-
 2. . -
 3 * — 3
 3* 300 , -
 4 ±0,001 , (nj), , -
 500 , -
 (500±10) 500 .
 (2),
 (Am) -
 $m \sim m_1 - m_2$,
 $\frac{m_i}{2}$, ;
 () ,
 5* (l) 0,090 , 0,130 .
 \bar{b} , ;
 500). (2),
 (l) (2), (0,090~0,130

-

_____ ,

(),

(), _____

:

(f) _____

-	-	-	-	-	-	-	-	-
		()	()	(2)		z		y

.7 27820—88

1.

-

. . , . . , . .

2.

19.09.88

3172

3.

5092—85

4.

5.

-

-

166—80	2
6456—82	2
7328—82	2
18326—87	2

7\ .

12 000 . 05 10 88

14.12 88 0,5 . 05

0,18 i . 8 .

« > «

» , 123840, , 0 , 3207

, 3